

# CORK-RUBBER SOLUTIONS




## Cork-rubber solutions

# Recycled and sustainable accessories for flooring systems

With very good vibration absorbing abilities, cork and rubber can be used in a multipurpose space such as a garage or absorb noise from neighbours when a washine machine is being used.

It is also possible to install a personal gym at home with these products applied in the floor. Easy to clean and easy to apply, it's a solution that can be part of anyone's life.

### ANTI-VIBRATION MAT LARGE SIZE RUBBER PAD

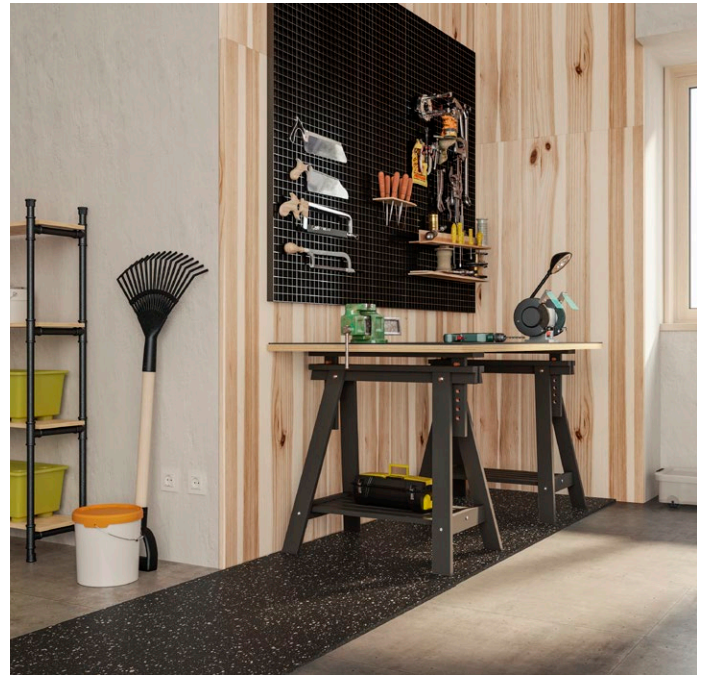

**Dimension**  
1500x700 mm



**Thickness**  
≈ 10 mm

#### FEATURES

- Easy and fast to install
- Very quick vibration absorbing abilities
- Produced with recycled rubber and recycled EVA and cork

#### COMMON USES

- Underneath treadmills
- Garages

#### TECHNICAL INFORMATION

Density	490–570 kg/m <sup>3</sup>
Tensile Strength (min)	0.25 MPa
Compressibility at 100 psi (min)	25–45%
Recovery at 100 psi (min)	80%



The **Cork Inside** seal guarantees that this product contains, in its cork formulation, a 100% natural and recyclable material with unique technical properties.

**Cork Inside** formulations combine cork with other materials and are developed and rigorously tested by Amorim Cork Composites' innovation and engineering teams. **Cork Inside** responds to stringent requirements and guarantees the performance required for its application.



## MULTIPURPOSE PADS

PACK OF 4 RUBBER PADS



**Dimension**  
100x100 mm



**Thickness**  
≈ 10 mm

### FEATURES

- Easy and fast to install
- Very quick vibration absorbing abilities
- Produced with recycled rubber and recycled EVA and cork

### COMMON USES

- Underneath washing machines
- Electricity generators
- Air conditioning units
- Workbench machine tools
- Chillers

### TECHNICAL INFORMATION

Density	490–570 kg/m <sup>3</sup>
Tensile Strength (min)	0.25 MPa
Compressibility at 100 psi (min)	25–45%
Recovery at 100 psi (min)	80%

## MACHINE PAD

FOR UNDERNEATH YOUR MACHINES



**Dimension**  
600x600 mm



**Thickness**  
≈ 10 mm

### FEATURES

- Easy and fast to install
- Very quick vibration absorbing abilities
- Produced with recycled rubber and recycled EVA and cork

### COMMON USES

- Underneath washing machines

### TECHNICAL INFORMATION

Density	490–570 kg/m <sup>3</sup>
Tensile Strength (min)	0.25 MPa
Compressibility at 100 psi (min)	25–45%
Recovery at 100 psi (min)	80%

# AMORIM CORK COMPOSITES

The data provided in this brochure refers to typical figures. This information is not intended to be used as a purchasing specification and does not imply suitability for use in any specific application. Failure to select the proper product may result in either product damage or personal injury. Please contact Amorim Cork Composites regarding recommendations for specific applications. Amorim Cork Composites expressly disclaims all warranties, including any implied warranties of merchantability or of fitness for any particular purpose. Amorim Cork Composites shall not be liable for any indirect, special, incidental, consequential or punitive damages as a result of using the information listed in this brochure, any of its material specification sheets, its products or any future use or re-use of them by any person or entity. For contractual purposes, please request our Product Specifications Sheet (PDA).



## AMORIM CORK COMPOSITES

R. Comendador Américo Ferreira Amorim, 260  
4536-902 Mozelos, Santa Maria da Feira  
Portugal

T. +351 22 747 5300

F. +351 22 747 5301

E. [info.acc@amorim.com](mailto:info.acc@amorim.com)

## AMORIM CORK COMPOSITES USA

26112 110<sup>th</sup> Street  
Trevor, WI 53179  
USA

T. +1 262 862 2311

F. +1 262 862 2500

E. [info.acc@amorim.com](mailto:info.acc@amorim.com)

[www.amorimcorkcomposites.com](http://www.amorimcorkcomposites.com)

