

PR080

Material Data Sheet



Material Description & Properties

Agglomerated cork and recycled EVA and PU foams underlay for impact noise and thermal insulation.

KEY FEATURES

- Excellent acoustic insulation.
- Good load absorption capacity.
- The most versatile underlay with high durability and good performance.
- High durability and long term resilience.
- Contains no SBR rubber.
- Anti-slip underlay.

Tested according to MMFA/EPLF minimum requirements group 1 and 2.

STANDARD DIMENSIONS

Thickness (mm)	2
Width and Length (m)	1 x 15

TEST	LIMIT	UNIT	RESULT
Density	—	kg/m ³	≥ 250
Punctual Conformability (PC)	≥ 0.5	mm	≥ 1.3
Compression Strength (CS)	≥ 200	kPa	320
Compression Creep (CC)	≥ 10	kPa	50
Impact Sound (IS)	≥ 10	dB	20
Thermal Resistance (R)*	≥ 0.15	m ² C/W	0.031
Dynamic Load (DL)	≥ 10 000	cycles	≥ 10 000

* Suitable for underfloor heating and cooling.

PHYSICAL AND MECHANICAL PROPERTIES

Specific Weight ⁽¹⁾	>250 Kg/m ³
Tensile Strength ⁽¹⁾	≥ 250 kPa
Compression at 0.7MPa ⁽¹⁾	15 - 40 %
Recovery after 0.7MPa ⁽¹⁾	≥ 60 %

⁽¹⁾ ISO 7322

THERMAL PROPERTIES


Thermal Conductivity	0.0637 W/m°C ⁽¹⁾
Thermal Resistance	0.0314 m ² C/W ⁽¹⁾

⁽¹⁾ ISO 8301

ACOUSTICAL RESULTS

Test procedure according to ISO 10140-1:2010; ISO 10140-3:2010; ISO 10140-4:2010 and ISO 717-2:2013 standards.

Thickness	2 mm
Flooring	Laminate
$\Delta L_w(C_{l,\Delta})$	20 dB

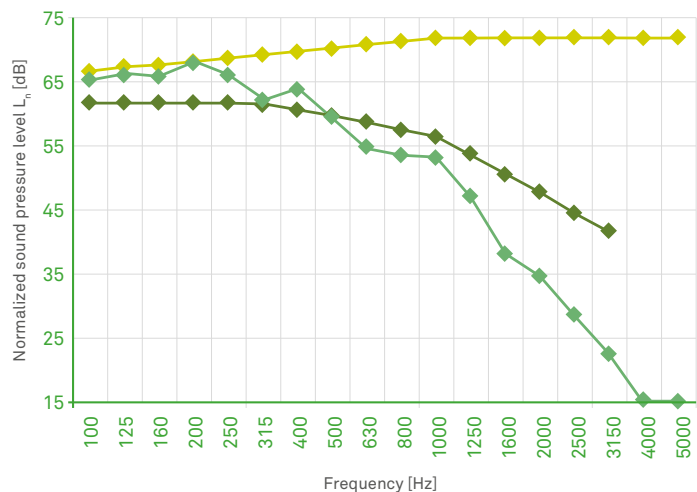


$L_{n,ref}$ (dB)
 $L_{n,r}$ (dB) - 2mm - Laminate

Adjusted refer.curve (dB)

$L_{n,r}$ - Normalized impact sound pressure level of the reference floor with the floor covering under test;
 $L_{n,ref}$ - Normalized impact sound pressure level of the Lab reference floor;
 ΔL_w - Impact sound pressure level reduction index of the covering under test, on a normalized floor;

TEST APPARATUS (ΔL_w)

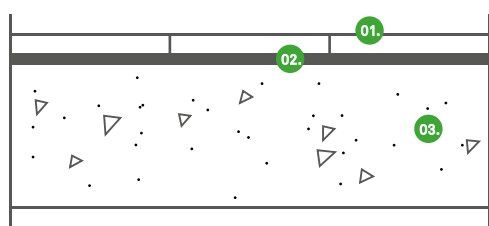


01.
 Floor covering composed by Laminate floor

02.
 Agglomerated cork resilient layer - PRO 80


03.
 Reinforced concrete slab of thickness 140 mm

PHYSICAL AND MECHANICAL PROPERTIES

COMPRESSIVE STRENGTH

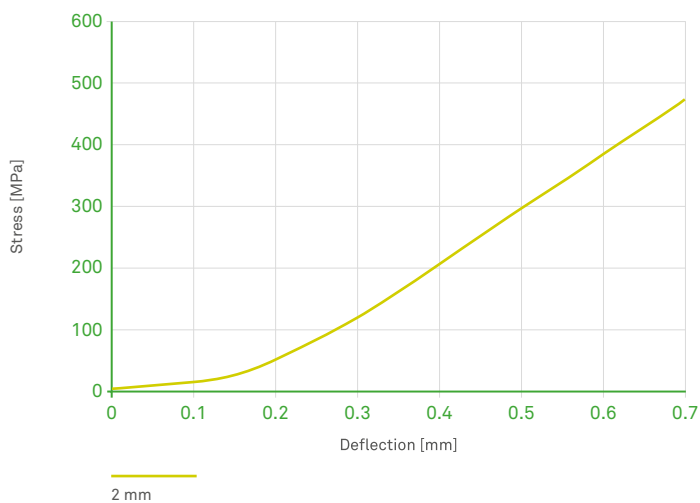


CREEP DEFLECTION @ 50 kPa (% OF START HEIGHT)

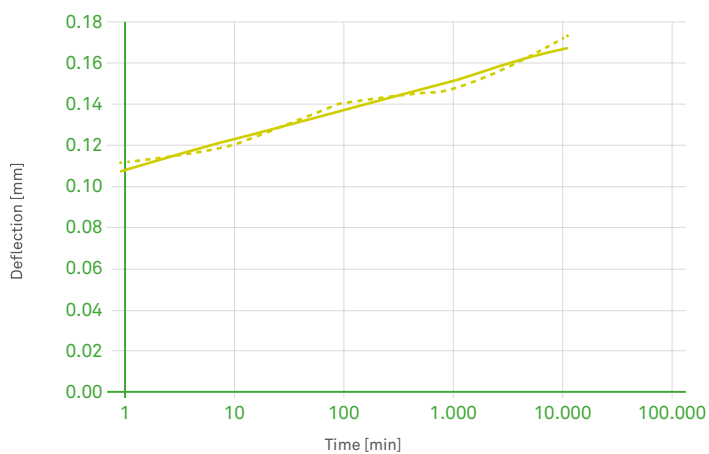


Note: Following ISO8013-1998 measured in Cantilever Test System

INSTALLATION

GLUED FLOORS

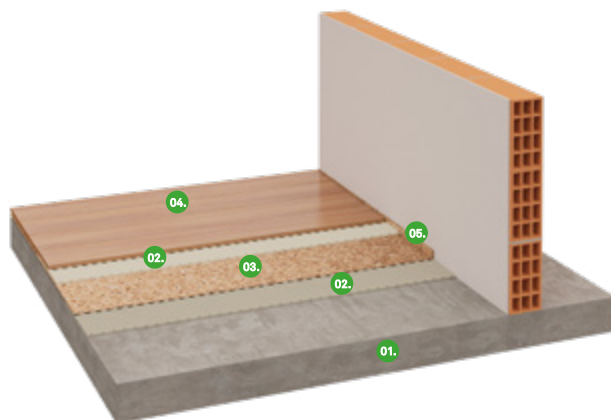

NON GLUED FLOORS

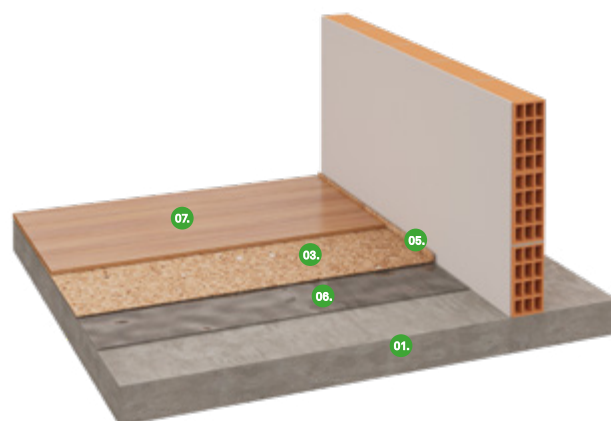

01.

Reinforced concrete slab

02.

Adhesive

03.

Agglomerated cork resilient layer - PRO 80

04.

Floor covering composed by glued down Wood Floor

05.

Perimeter insulation barrier

06.

Vapor barrier

07.

Floor covering composed by non glued laminate floor

GENERAL INSTALLATION INSTRUCTIONS

The following installation instructions are recommended by Amorim Cork Composites, but are not intended as a definitive project specification. They are presented in an attempt to be used with recommended installation procedures of the flooring manufacturers.

Room Conditions

Temperature > 10°C / Room moisture content < 75%.

Subfloor

All subfloor work should be structurally sound, clear and level. The moisture content of the subfloor should not be more than 2.5% (CM) by weight measured on concrete subfloors.

Vapor Insulation Barrier (only for Non Glued Floors)

PE (Polyethylene) vapor insulation barrier covering the entire flooring area, minimum 50mm wide vertically around the perimeter of the entire floor MUST be installed prior to the Amorim PRO 80.

Install by overlapping (minimum 100mm) the PE foil, and use an adequate tape to adhere/fix it, if necessary. After completion, PE foil should cover the entire concrete area without gaps. Never mechanically fasten the PE foil barrier with screws, nails or staples as this will severely diminish the performance of the insulation barrier.

Installation Instruction for Amorim PRO 80

Unpack the Amorim PRO 80 at least 24h before the installation and store it in the room where the installation will take place. Cut the Amorim PRO 80 to desired length and install directly over the entire floor pulled 30mm up the walls with crown of the rolled materials up, removing all trapped air.

An independent perimeter insulation barrier can be installed around the entire perimeter of the room with width equal to that of the floor build up.

Both solutions are valid, the most important is to avoid lateral propagation of impact noise. The barrier must also be applied in the perimeter of pipes, ducts or any other component protruding from the floor. Spot adhere the strips to the wall using acrylic glue or a bead of silicone sealant.

After completion, the Amorim PRO 80 should cover the entire flooring area without gaps and with joints butted tight and preferably taped.

Final Flooring

Always follow manufacturers recommended installation instructions.

Recommended Adhesives:

Wood floor to Amorim PRO 80: Water-Based Emulsion/Polyurethane Glue; Vinyl and linoleum to Amorim PRO 80: Water-Based Emulsion/Synthetic Resin Glue;

Ceramic to Amorim PRO 80: Flexible Cement Glue;

Amorim PRO 80 to slab/screed: Water-Based Emulsion/Acrylic Adhesives;

Application Process

NON GLUED FLOORS



1. Vapor insulation barrier application; 2. Perimeter barrier application; 3. Underlay application; 4. Tape application in joints between rolls; 5. Final floor application; 6. Perimeter insulation barrier cut.

GLUED FLOORS



1. Perimeter barrier application; 2. Underlay application (glued); 3. Final floor application (glued); 4. Perimeter insulation barrier cut.

Important Notes

Never mechanically fasten the Amorim PRO 80 to the flooring floor as this will severely diminish its acoustical value.

For detailed installation instructions, please contact us.



The mark of responsible forestry



The data provided in this Material Data Sheet represents typical values. This information is not intended to be used as a purchasing specification and does not imply suitability for use in a specific application. Failure to select the proper product may result in either equipments damage or personal injury. Please contact Amorim Cork Composites regarding specific application recommendations. Amorim Cork Composites expressly disclaims all warranties, including any implied warranties or merchantability or of fitness for a particular purpose. Amorim Cork Composites is not liable for any indirect special, incidental, consequential, or punitive damages as a result of using the information listed in this MDS. Any of its material specification sheets, its products or any future use or re-use of them by any person or entity. For contractual purposes, please request our Product Specifications Sheet (PDA).

www.amorimcorkcomposites.com