



UNDERLAYMENTS



➤ Cork, shapping the future through sustainability

Cork comes from the bark of the cork oak tree (*Quercus Suber L.*). It is a plant tissue, 100% natural, which covers the trunk and branches.


One cubic centimeter of cork contains about 40 million cells. Cork is known as “nature’s foam” due to its alveolar structure.

Cork is sustainably harvested by specialized professionals without damaging the trunk. The cork oak tree re-grows the outer bark layer and is harvested once ever 9 years over the course of its lifetime, which is about 200 years. Cork is a natural material which is both renewable and recyclable.

Cork, a natural CO₂ retainer

Cork oak forests are important natural carbon sinks. They make a key contribution to the air we breathe because they capture CO₂ and it is estimated that for every ton of cork produced, cork oak forests can sequester up to 73 tons of CO₂.

1 ton of cork
produced



Up to 73 tons of CO₂*
sequestered by the
cork oak forest

* Source: https://www.apcor.pt/wp-content/uploads/2015/10/Brochura_Ambiente__EN.pdf




We have always been circular.

Amorim Cork Composites - a Corticeira Amorim company - was founded in 1963 to add value to cork not used in the cork stoppers industry and to cork stoppers at the end of their life.

Since then, in the framework of our innovation culture, we have discovered and identified other materials from other industries (industrial symbiosis) to blend with cork and leverage its attributes.

For this purpose, we use different materials from the footwear, automotive and packaging industries. We give a new life to materials that otherwise would be wasted.

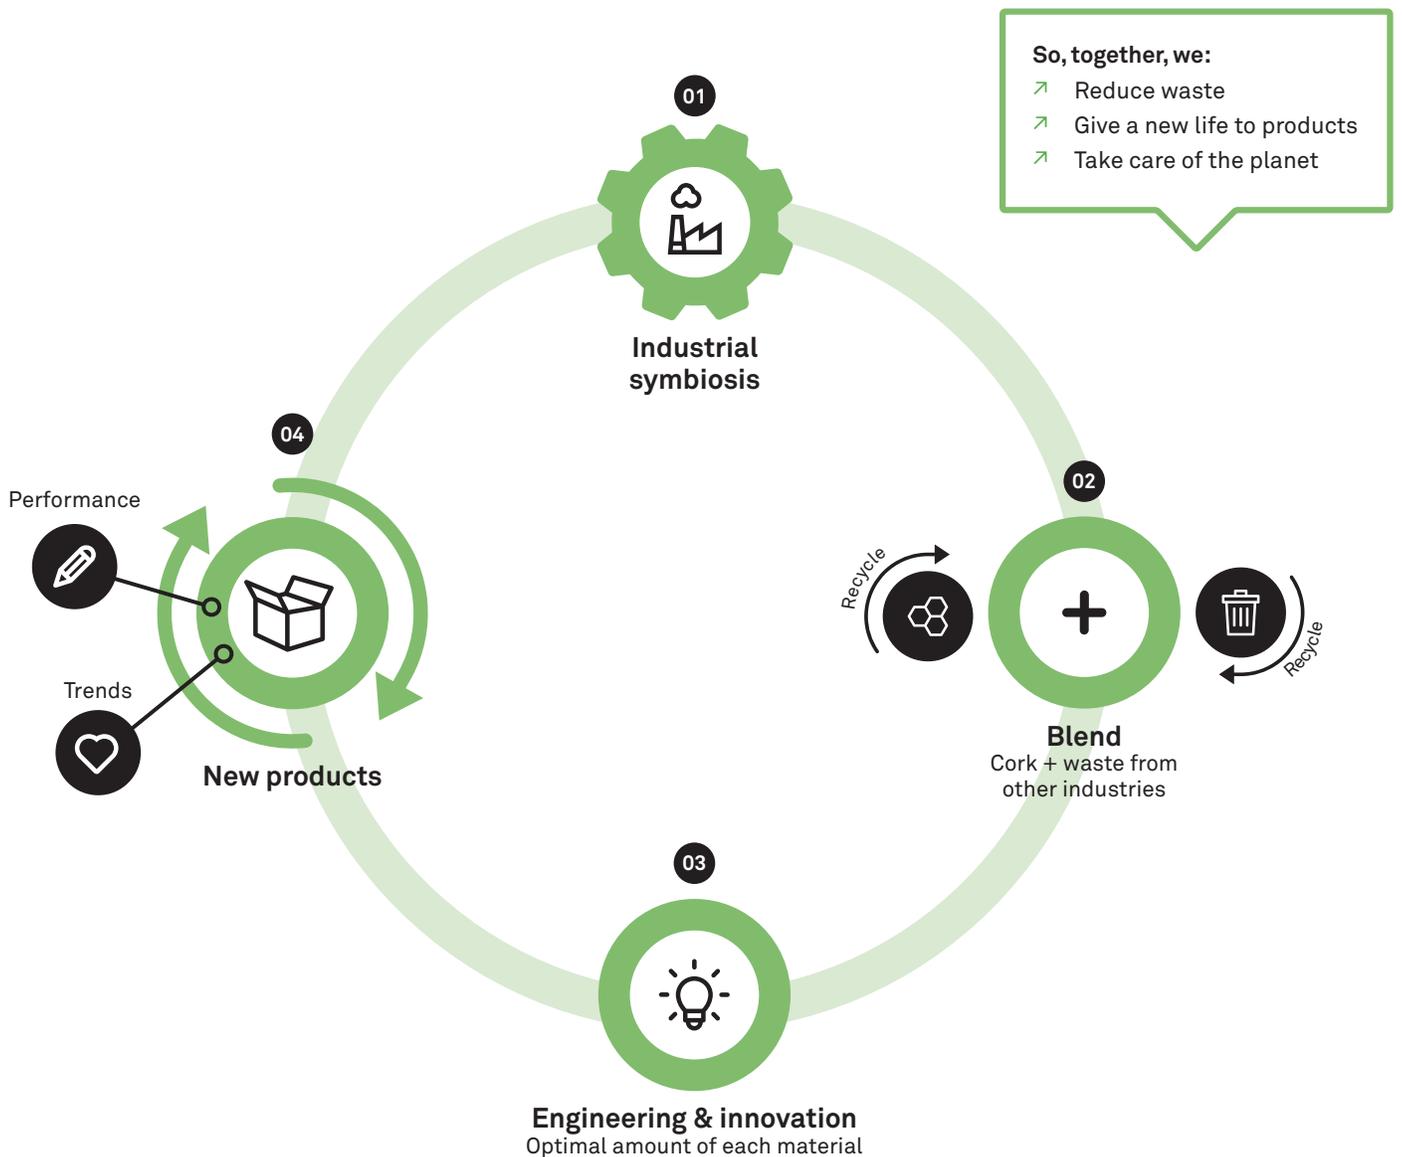



Underlayments

Sustainable and recycled accessories for flooring systems

Cork is a common denominator in the production of our accessories and supporting materials for floorings, such as, underlayment. When applied under a floor, an underlayment provides more comfort, protection and longevity to the final floor, guaranteeing even greater energy efficiency and acoustic insulation.

Underlayment may consist only of cork agglomerate or contain other recycled materials, such as Rubber, PU and EVA foams. Compared to synthetic materials, cork is the right choice when looking for a solution that guarantees performance but is also sustainable from an environmental point of view.

Our underlayments are a great solution for new construction applications and for renovations of existing spaces.

TYPE OF FLOOR	RECOMMENDED UNDERLAYMENT	MAIN FEATURE	
LVT / SPC	Unique	<ul style="list-style-type: none"> ➤ Vinyl ➤ Helps to protect LVT flooring from damage to the click-system joints. ➤ Maximize the service level of the joining system connecting the laminate boards. ➤ Anti-slip with long-term physical properties, excellent load absorption capacity and also for heated floors. 	
	Protection	<ul style="list-style-type: none"> ➤ Shelter ➤ 100% cork, 100% natural. Ecological, sustainable and recyclable. ➤ Designed for protection of the click of LVT floors, for impact, noise and thermal insulation. 	
	Protection Vapor Barrier	<ul style="list-style-type: none"> ➤ 2 in 1 solution: Pre-attached vapor barrier for moisture protection. ➤ Recommended for floating installations. 	
Wood	Nature	<ul style="list-style-type: none"> ➤ Green ➤ 100% cork, 100% natural. Ecological, sustainable and recyclable. ➤ High durability anti-slip underlayment. Suitable for heated floors. 	
	Nature Vapor Barrier	<ul style="list-style-type: none"> ➤ 2 in 1 solution: Pre-attached vapor barrier for moisture protection. ➤ Recommended for floating installations. 	
	Plus	<ul style="list-style-type: none"> ➤ Acoustic ➤ The most versatile underlayment with high durability and good performance. ➤ Excellent acoustic performance and load absorption capacity. ➤ Suitable for heated floors. Anti-slip. 	
	Plus Vapor Barrier	<ul style="list-style-type: none"> ➤ 2 in 1 solution: Pre-attached vapor barrier for moisture protection. ➤ Recommended for floating installations. 	
	Fusion	<ul style="list-style-type: none"> ➤ Endurance ➤ Excellent compensation for uneven floors. ➤ Good acoustic, thermal insulation, and also load absorption capacity. ➤ Suitable for heated floors. Anti-slip. 	
	Fusion Vapor Barrier	<ul style="list-style-type: none"> ➤ 2 in 1 solution: Pre-attached vapor barrier for moisture protection. ➤ Recommended for floating installations. 	
	Profile	<ul style="list-style-type: none"> ➤ Thermal ➤ Anti-slip underlayment with excellent thermal performance. ➤ High comfort when walking because of the profile format. 	
Ceramic/ natural stone	LC+	<ul style="list-style-type: none"> ➤ Compensation ➤ Excellent compensating ability on uneven surfaces and made to prevent crack supression on ceramic. ➤ Provides cushioning underfoot as well as reducing sound transmission and impact sound, such as footsteps. ➤ Anti-slip underlayment with excellent load absorption capacity. Suitable for heated floors. 	



NATURE AND NATURE VAPOR BARRIER*



Density	220–280 Kg/m ³
Tensile Strength	≥ 200 kPa ≥ 550 kPa*
Thickness	2 mm
Acoustic Performance	
Impact Sound (IS) ¹	19 dB
Thermal Performance	
Thermal Resistance (TR)	0.039 (m ² .°C/W)
Floor Durability	
Punctual Conformability (PC)	≥ 1.3 mm
Compressive Strength (CS)	≥ 200 kPa
Compressive Creep (CC)	> 50 kPa
Dynamic Load (DL)	≥ 100 000
Vapor Barrier *	
Water Vapor Resistance (SD)	75 m



* With vapor barrier

PLUS AND PLUS VAPOR BARRIER*



Density	250–300 Kg/m ³
Tensile Strength	≥ 200 kPa ≥ 550 kPa*
Thickness	2 mm
Acoustic Performance	
Impact Sound (IS) ¹	20 dB
Thermal Performance	
Thermal Resistance (TR)	0.031 (m ² .°C/W)
Floor Durability	
Punctual Conformability (PC)	≥ 1.3 mm
Compressive Strength (CS)	≥ 200 kPa
Compressive Creep (CC)	> 50 kPa
Dynamic Load (DL)	≥ 10 000
Vapor Barrier *	
Water Vapor Resistance (SD)	75 m



* With vapor barrier



The **Cork Inside** seal guarantees that this product contains, in its cork formulation, a 100% natural and recyclable material with unique technical properties.

Cork Inside formulations combine cork with other materials and are developed and rigorously tested by Amorim Cork Composites' innovation and engineering teams. **Cork Inside** responds to stringent requirements and guarantees the performance required for its application.

PROTECTION AND PROTECTION VAPOR BARRIER*



Density	250–350 Kg/m ³
Tensile Strength	≥ 500 kPa ≥ 550 kPa*
Thickness	1.1 mm
Acoustic Performance	
Impact Sound (IS) ²	16 dB
Thermal Performance	
Thermal Resistance (TR)	- (m ² .°C/W)
Floor Durability	
Punctual Conformability (PC)	> 0.5 mm
Compressive Strength (CS)	> 400 kPa
Compressive Creep (CC)	TBD
Dynamic Load (DL)	≥ 100 000
Vapor Barrier *	
Water Vapor Resistance (SD)	75 m




* With vapor barrier

FUSION AND FUSION VAPOR BARRIER*



Density	200–280 Kg/m ³
Tensile Strength	≥ 200 kPa ≥ 550 kPa*
Thickness	2 mm
Acoustic Performance	
Impact Sound (IS) ¹	20 dB
Thermal Performance	
Thermal Resistance (TR)	0.033 (m ² .°C/W)
Floor Durability	
Punctual Conformability (PC)	> 1.2 mm
Compressive Strength (CS)	> 200 kPa
Compressive Creep (CC)	> 50 kPa
Dynamic Load (DL)	≥ 100 000
Vapor Barrier *	
Water Vapor Resistance (SD)	75 m

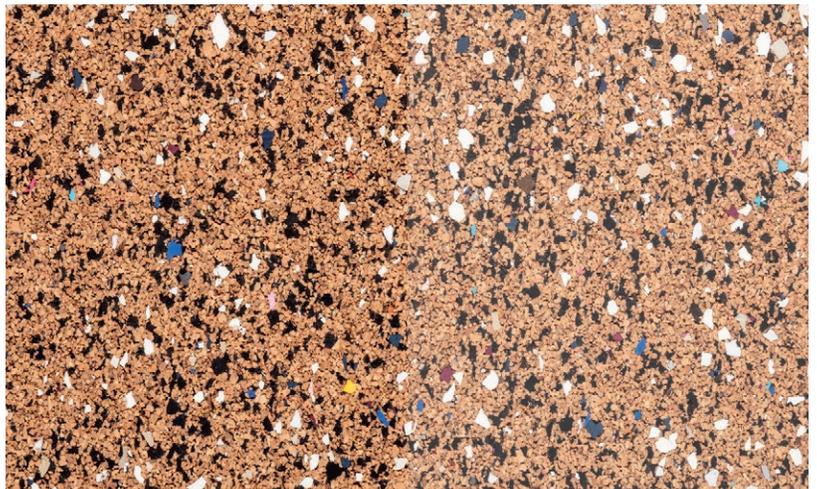

* With vapor barrier

* Recommended for floating installations

- 1 Tested under a laminate floor
- 2 Tested under a LVT floor
- 3 Tested under a wood floor
- 4 Tested under a ceramic floor

The data provided in this brochure refers to typical figures. This information is not intended to be used as a purchasing specification and does not imply suitability for use in any specific application. Failure to select the proper product may result in either product damage or personal injury. Please contact Amorim Cork Composites regarding recommendations for specific applications. Amorim Cork Composites expressly disclaims all warranties, including any implied warranties of merchantability or of fitness for any particular purpose. Amorim Cork Composites shall not be liable for any indirect, special, incidental, consequential or punitive damages as a result of using the information listed in this brochure, any of its material specification sheets, its products or any future use or re-use of them by any person or entity. For contractual purposes, please request our Product Specifications Sheet (PDA). Product images are for illustrative purposes only.

PROFILE

Density	150–200 Kg/m ³
Tensile Strength	≥ 200 kPa
Thickness	2.5 mm
Acoustic Performance	
Impact Sound (IS) ³	20 dB
Thermal Performance	
Thermal Resistance (TR)	0.066 (m ² .°C/W)
Floor Durability	
Punctual Conformability (PC)	≥ 0.5 mm
Compressive Strength (CS)	≥ 160 kPa
Compressive Creep (CC)	> 50 kPa
Dynamic Load (DL)	≥ 100 000



LC+



Density	560–650 Kg/m ³
Tensile Strength	≥ 500 kPa
Thickness	2 mm
Acoustic Performance	
Impact Sound (IS) ⁴	18 dB
Thermal Performance	
Thermal Resistance (TR)	0.016 (m ² .°C/W)
Floor Durability	
Punctual Conformability (PC)	≥ 1.7 mm
Compressive Strength (CS)	≥ 200 kPa
Compressive Creep (CC)	> 50 kPa
Dynamic Load (DL)	≥ 100 000



UNIQUE



Density	550–650 Kg/m ³
Tensile Strength	≥ 500 kPa
Thickness	1.6 mm
Acoustic Performance	
Impact Sound (IS) ²	21 dB
Thermal Performance	
Thermal Resistance (TR)	0.015 (m ² .°C/W)
Floor Durability	
Punctual Conformability (PC)	≥ 1 mm
Compressive Strength (CS)	≥ 400 kPa
Compressive Creep (CC)	> 50 kPa
Dynamic Load (DL)	≥ 100 000



Go4Cork underlayments with negative carbon balance

Cork as the starting point for a sustainable future

Go4cork is a brand of Amorim Cork Composites, which has always been committed to ensuring the transition from a linear economy of “take, make and dispose” to a circular economy.

Independent studies conducted by EY have concluded that all the products analyzed have a negative carbon balance when considering the carbon sequestration of cork oak forests and production-related emissions.

This means that the Go4Cork underlayments' carbon sequestration exceeds the CO₂ emissions resulting from their production.



GO4CORK NATURE

- 12.4 kg/eqCO₂ per m²*

Up to 36 times less greenhouse gas emissions than PU Foam (Polyurethane) solutions**



GO4CORK FUSION

- 14.2 kg/eqCO₂ per m²*

Up to 20 times less greenhouse gas emissions than PU Foam (Polyurethane) solutions**



GO4CORK PLUS

- 8.1 kg/eqCO₂ per m²*

Up to 34 times less greenhouse gas emissions than PU Foam (Polyurethane) solutions**



GO4CORK PLUS VB

- 7.8 kg/eqCO₂ per m²*

Up to 22 times less greenhouse gas emissions than PU Foam (Polyurethane) solutions**



The **Negative Carbon Balance** seal certifies that when taking into account the carbon sequestration from cork oak forests, the manufacture of Go4Cork products sequesters more CO₂ than it emits.

* EY Study: Underlayment Go4Cork Carbon Footprint Analysis, 2020 / 2021 (cradle to gate).

** These Amorim Cork Composites conclusions (outside the scope of the EY study) were based on the ecoinvent version 3.5 database (2018) but have not been verified by a third party.



Durability and Performance over time

When compared to other solutions, our underlayments perform better over time.

In general, cork has a higher compressive strength and compressive creep due to its resilience, which means that cork completely recovers its thickness after being compressed and preserves the technical properties (acoustic and thermal performance) where it is applied.

Unlike some standard foams that break down their cells and completely lose their integrity and technical properties in a short time.

- Made of natural and recycled raw materials
- Compressive creep and performance over time, due to constant thickness preserved
- Suitable for floors with pre-attached underlayment for additional acoustic performance
- Absorbs high imperfections of the concrete substrate
- Avoids telegraphy of the concrete sub-floor or previous floor (in refurbishment situations)

TECHNICAL PROPERTIES



Reduction of impact noise



Reduction of footfall noise



Thermal resistance



Compensates for uneven floor



Protection from damage from falling objects



Resistance to diffusion of water vapor





Load resistance



Antislip

LIFETIME OF PRODUCT

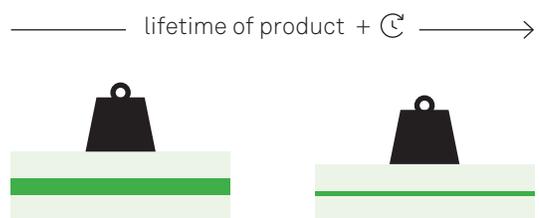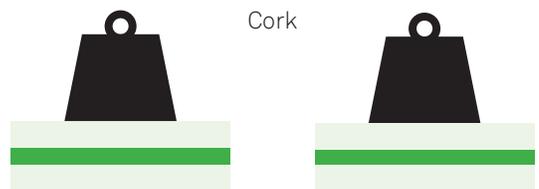

PE foam

AMORIM CORK COMPOSITES



Nature

Amorim Cork Composites
R. Comendador Américo
Ferreira Amorim, 260
4536-902 Mozelos,
Santa Maria da Feira, Portugal

Z-158,10-237

Brandverhalten:
Klasse E+42 (E1)
(auch nach DIN EN 12512 auf
Umgebungsgemäß-Zulassung)

Emissionsgeprüftes
Bauprodukt nach
DIN EN 12518

Unique

Amorim Cork Composites
R. Comendador Américo
Ferreira Amorim, 260
4536-902 Mozelos,
Santa Maria da Feira, Portugal

Z-158,10-233

Brandverhalten:
Klasse E+42 (E1)
(auch nach DIN EN 12512 auf
Umgebungsgemäß-Zulassung)

Emissionsgeprüftes
Bauprodukt nach
DIN EN 12518

Plus

Amorim Cork Composites
R. Comendador Américo
Ferreira Amorim, 260
4536-902 Mozelos,
Santa Maria da Feira, Portugal

Z-158,10-239

Brandverhalten:
Klasse E+42 (E1)
(auch nach DIN EN 12512 auf
Umgebungsgemäß-Zulassung)

Emissionsgeprüftes
Bauprodukt nach
DIN EN 12518



AMORIM CORK COMPOSITES

R. Comendador Américo Ferreira Amorim, 260
4536-902 Mozelos, Santa Maria da Feira

Portugal

T. +351 22 747 5300

F. +351 22 747 5301

E. info.acc@amorim.com

AMORIM CORK COMPOSITES USA

26112 110th Street

Trevor, WI 53179

USA

T. +1 262 862 2311

F. +1 262 862 2500

E. info.acc@amorim.com

www.amorimcorkcomposites.com

